

Series
VENTS OV



Low pressure axial fans in the steel casing with the air capacity up to 11900 m³/h for wall mounting.

Series
VENTS OVK



Low pressure axial fans in the steel casing with the air capacity up to 11900 m³/h for wall mounting.

Series
VENTS VKF



Low pressure axial fans in the steel casing with the air capacity up to 11900 m³/h for vent duct mounting.

■ Applications

Combined supply and exhaust ventilation systems for various premises where high air capacity at relatively low system resistance is required. OV and OVK fans can be used for the direct air exhaust or pressurization in smoke ventilation systems. OV and OVK fan are suitable for outdoor wall mounting.

■ Design

The fan casing and the impeller are made of steel with polymeric coating. OV and OVK fan terminal box is equipped with the cord for remote connection. VKF fan is fitted with the external terminal box mounted on the fan casing.

■ Motor

The impellers are powered by two- or three-pole, single- or three-phase asynchronous motors with external rotor and built-in thermal overheating protection depending on the model. Ball bearings in the motor provide long service life designed for at least 40 000 hours. Motor protection rating IP 44.

■ Speed control

Both smooth or step speed control is performed by means of the thyristor or autotransformer controller. Several fans can be connected to one controller if the total power and operating current do not exceed the rated controller values.

■ Mounting

Fan is installed on the wall surface by means of a square (OV series) or round (OVK series) mounting plate. VKF fan is installed into the duct by means of connecting flanges. The fan is powered through the external remote terminal box. Power supply and installation shall be performed in compliance with the manual and wiring diagram on the terminal box.

Designation key: _____

Series and modification	Motor modification		Flange diameter
VENTS OV – with a square mounting plate	Number of poles	Phase	200; 250; 300; 350; 400; 450; 500; 550; 630
VENTS OVK – with a round mounting plate	2	E – single phase	
VENTS VKF – for mounting into a vent duct	4	D – three phases	

Accessories



page 301

page 310

page 310

page 311

page 314

page 315

Technical data:

single-phase fans

	OV / OVK / VKF 2E 200	OV / OVK / VKF 2E 250	OV / OVK / VKF 4E 250	OV / OVK / VKF 2E 300	OV / OVK / VKF 4E 300	OV / OVK / VKF 4E 350
Voltage [V / 50 Hz]	230	230	230	230	230	230
Power [W]	55	80	50	145	75	140
Current [A]	0,26	0,4	0,22	0,66	0,35	0,65
Maximum air flow [m ³ /h]	860	1050	800	2230	1340	2500
RPM [min ⁻¹]	2300	2400	1380	2300	1350	1380
Noise level at 3 m [dBA]	50	60	55	60	58	62
Maximum operating temperature [°C]	-30 +60	-30 +60	-30 +60	-30 +60	-30 +60	-30 +60
Protection rating	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)

Technical data:

single-phase fans

	OV / OVK / VKF 4E 400	OV / OVK / VKF 4E 450	OV / OVK / VKF 4E 500	OV / OVK / VKF 4E 550	OV / OVK / VKF 4E 630
Voltage [V / 50 Hz]	230	230	230	230	230
Power [W]	180	250	420	550	750
Current [A]	0,82	1,2	1,95	2,55	3,5
Maximum air flow [m ³ /h]	3580	4680	7060	8800	11900
RPM [min ⁻¹]	1380	1350	1300	1300	1360
Noise level at 3 m [dBA]	63	64	69	70	75
Maximum operating temperature [°C]	-30 +60	-30 +60	-30 +60	-30 +60	-30 +60
Protection rating	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)

Technical data:

three-phase fans


	OV / OVK / VKF 2D 250	OV / OVK / VKF 4D 250	OV / OVK / VKF 2D 300	OV / OVK / VKF 4D 300	OV / OVK / VKF 4D 350	OV / OVK / VKF 4D 400	OV / OVK / VKF 4D 450
Voltage [V / 50 Hz]	400	400	400	400	400	400	400
Power [W]	80	60	145	75	140	180	250
Current [A]	0,22	0,17	0,25	0,22	0,38	0,47	0,6
Maximum air flow [m ³ /h]	1060	850	2310	1310	2520	3740	5280
RPM [min ⁻¹]	2600	1400	2350	1380	1380	1380	1360
Noise level at 3 m [dBA]	60	55	60	58	62	64	65
Maximum operating temperature [°C]	-30 +60	-30 +60	-30 +60	-30 +60	-30 +60	-30 +60	-30 +60
Protection rating	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)	IP 24 (VKF IP X4)



AXIAL FANS IS


Fan overall dimensions:

Type	Dimensions [mm]					Mass [kg]
	$\varnothing D$	$\varnothing d$	B	B1	L	
OV 2E 200	210	7	312	260	145	3,0
OV 2E 250	260	7	370	320	155	4,0
OV 4E 250	260	7	370	320	155	3,5
OV 2E 300	326	9	430	380	195	6,1
OV 4E 300	326	9	430	380	195	5,0
OV 4E 350	388	9	485	435	200	7,8
OV 4E 400	417	9	540	490	240	8,8
OV 4E 450	465	11	576	535	250	10,5
OV 4E 500	520	11	655	615	260	14,0
OV 4E 550	570	11	725	675	280	16,5
OV 4E 630	650	11	800	710	295	20,0
OV 2D 250	260	7	370	320	155	4,0
OV 4D 250	260	7	370	320	155	3,5
OV 2D 300	326	9	430	380	155	5,4
OV 4D 300	326	9	430	380	155	5,4
OV 4D 350	388	9	485	435	200	7,8
OV 4D 400	417	9	540	490	240	8,8
OV 4D 450	465	11	576	535	250	10,5

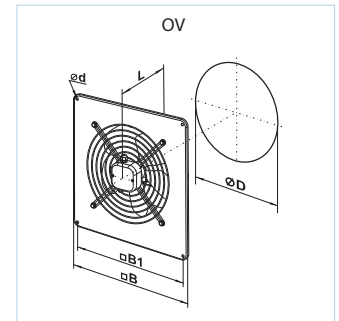


Fan overall dimensions:

Type	Dimensions [mm]					Mass [kg]
	$\varnothing D$	$\varnothing D1$	$\varnothing D2$	$\varnothing d$	L	
OVK 2E 200	210	250	280	7	145	2,8
OVK 2E 250	260	295	320	7	155	3,8
OVK 4E 250	260	295	320	7	155	3,4
OVK 2E 300	326	380	397	9	195	5,9
OVK 4E 300	326	380	397	9	195	5,0
OVK 4E 350	388	442	460	9	200	7,5
OVK 4E 400	417	504	528	9	240	8,5
OVK 4E 450	465	578	607	11	250	10,0
OVK 4E 500	520	590	655	11	260	14,0
OVK 4E 550	570	645	710	11	280	16,5
OVK 4E 630	650	760	800	11	295	20,0
OVK 2D 250	260	295	320	7	155	3,8
OVK 4D 250	260	295	320	7	155	3,4
OVK 2D 300	326	380	397	9	155	5,1
OVK 4D 300	326	380	397	9	155	5,1
OVK 4D 350	388	442	460	9	200	7,5
OVK 4D 400	417	504	528	9	240	8,5
OVK 4D 450	465	578	607	11	250	10,0

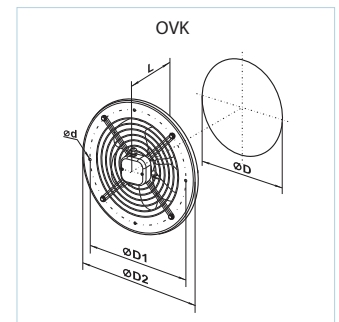


Fan overall dimensions:

Type	Dimensions [mm]						Mass [kg]
	$\varnothing D$	$\varnothing D1$	$\varnothing D2$	$\varnothing d$	B	L	
VKF 2E 200	205	250	280	7	290	120	3,1
VKF 2E 250	260	295	320	7	340	150	4,0
VKF 4E 250	260	295	320	7	340	150	4,1
VKF 2E 300	310	380	397	9	420	160	6,5
VKF 4E 300	310	380	397	9	420	160	6,5
VKF 4E 350	362	442	460	9	480	160	8,1
VKF 4E 400	412	504	528	9	550	170	9,1
VKF 4E 450	462	578	607	11	630	200	10,6
VKF 4E 500	515	600	650	11	635	220	12,8
VKF 4E 550	565	650	700	13	685	230	15,5
VKF 4E 630	645	740	790	13	780	230	18,5
VKF 2D 250	260	295	320	7	340	150	4,0
VKF 4D 250	260	295	320	7	340	150	4,1
VKF 2D 300	310	380	397	9	420	160	6,0
VKF 4D 300	310	380	397	9	420	160	6,0
VKF 4D 350	362	442	460	9	480	160	8,1
VKF 4D 400	412	504	528	9	550	170	9,1
VKF 4D 450	462	578	607	11	630	200	10,6

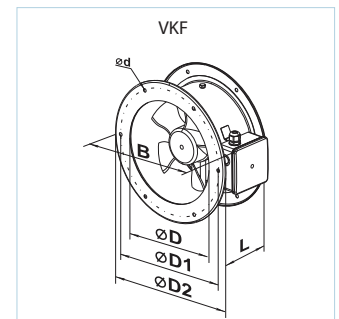


VENTS OV / OVK / VKF

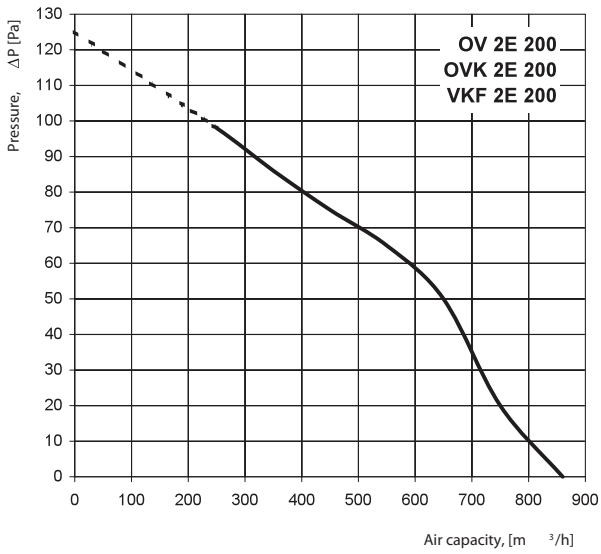

Sound-power level		Octave-frequency band [Hz]									
	Hz	Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dBA	65	56	58	58	57	59	55	51	45	

VENTS OV / OVK / VKF

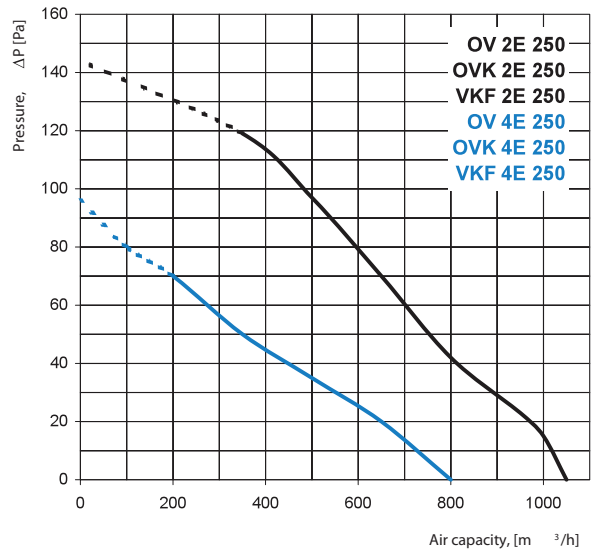


OV / OVK / VKF 2E 250

Sound-power level		Octave-frequency band [Hz]									
	Hz	Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dBA	76	68	66	68	70	68	68	63	58	

OV / OVK / VKF 4E 250

Sound-power level		Octave-frequency band [Hz]									
	Hz	Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dBA	60	52	50	52	53	52	52	44	43	

VENTS OV / OVK / VKF

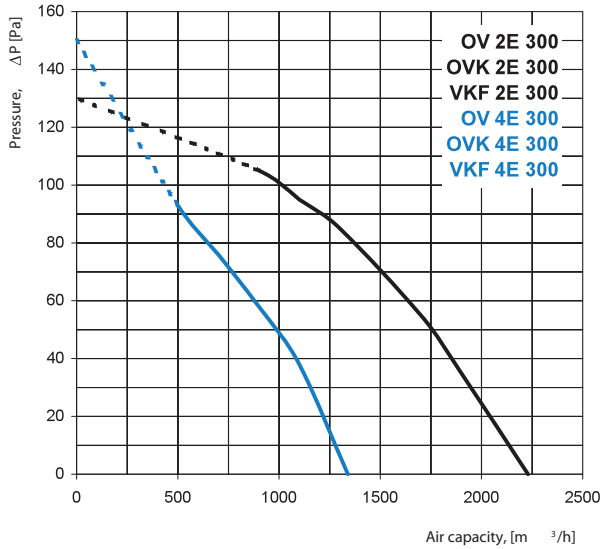


OV / OVK / VKF 2E 300

Sound-power level		Octave-frequency band [Hz]									
	Hz	Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dBA	78	72	72	70	72	70	59	63	43	

OV / OVK / VKF 4E 300

Sound-power level		Octave-frequency band [Hz]									
	Hz	Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dBA	67	58	57	59	57	58	53	52	49	

VENTS OV / OVK / VKF

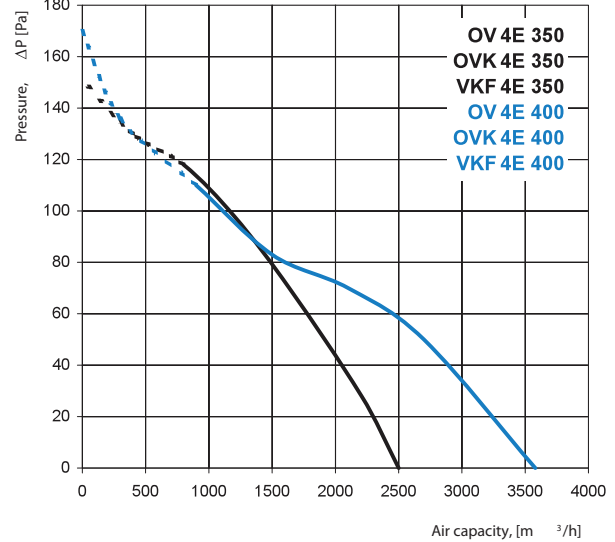

OV / OVK / VKF 4E 350


Sound-power level		Octave-frequency band [Hz]									
	Hz	Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dBA	70	61	62	64	63	63	58	56	52	

OV / OVK / VKF 4E 400

Sound-power level		Octave-frequency band [Hz]									
	Hz	Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dBA	75	66	68	66	69	67	55	61	56	

AXIAL FANS

VENTS OV / OVK / VKF

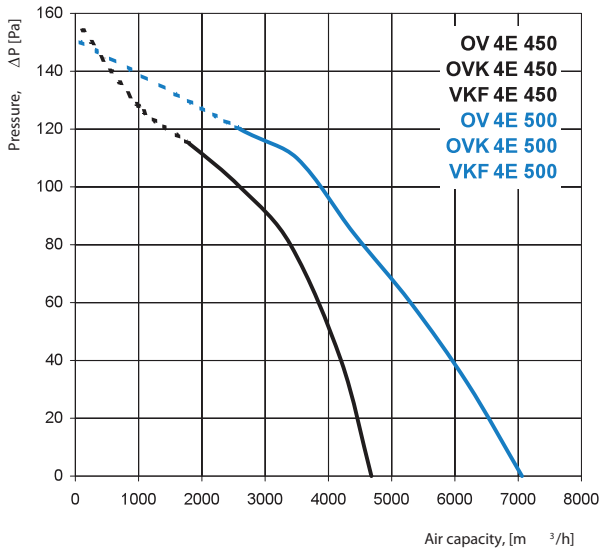


OV / OVK / VKF 4E 450

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	77	69	70	73	73	71	67	67	61

OV / OVK / VKF 4E 500

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	80	71	73	72	74	73	70	67	63

VENTS OV / OVK / VKF

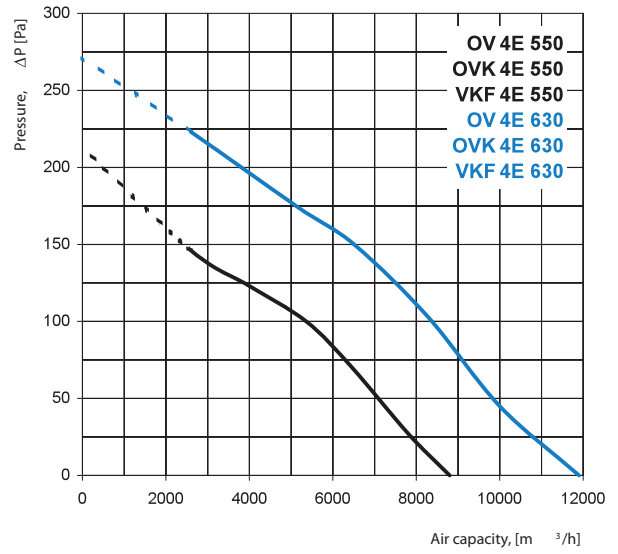


OV / OVK / VKF 4E 550

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	83	73	75	73	75	74	72	66	63

OV / OVK / VKF 4E 630

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	77	71	73	72	73	71	70	63	59

VENTS OV / OVK / VKF

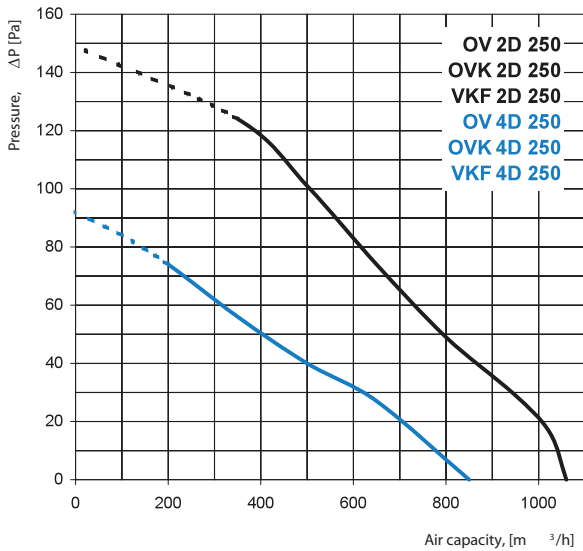


OV / OVK / VKF 2D 250

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	77	67	68	70	69	68	66	60	57

OV / OVK / VKF 4D 250

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	60	49	50	53	54	53	52	45	42

VENTS OV / OVK / VKF

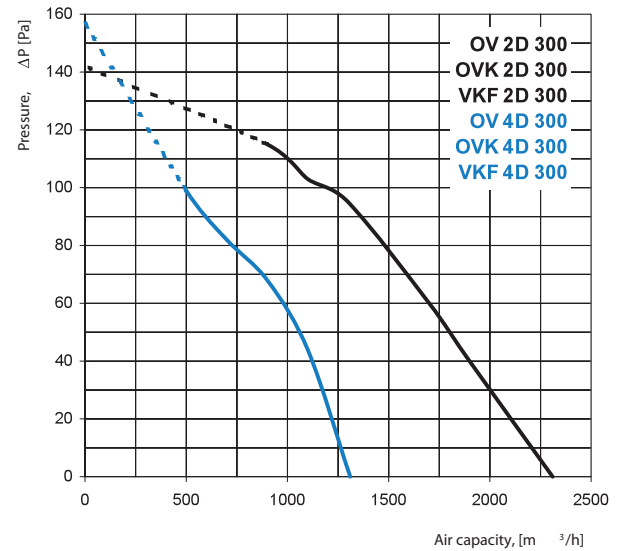


OV / OVK / VKF 2D 300

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	80	72	71	71	74	70	69	65	63

OV / OVK / VKF 4D 300

Sound-power level	Hz	Octave-frequency band [Hz]								
		Gen	63	125	250	500	1000	2000	4000	8000
L _{WA} to environment	dBA	63	58	55	58	56	58	57	52	48

VENTS OV / OVK / VKF

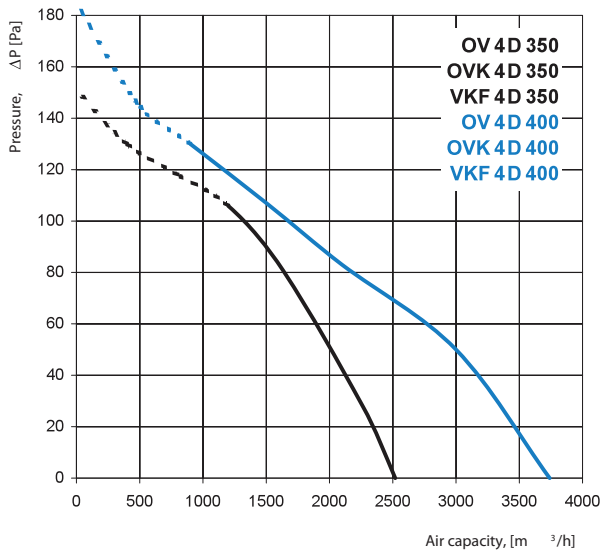


OV / OVK / VKF 4D 350

Sound-power level	Hz	Octave-frequency band [Hz]									
		Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dB(A)	72	62	61	64	64	61	51	56	54	

OV / OVK / VKF 4D 400

Sound-power level	Hz	Octave-frequency band [Hz]									
		Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dB(A)	75	65	66	69	66	67	54	60	55	

VENTS OV / OVK / VKF

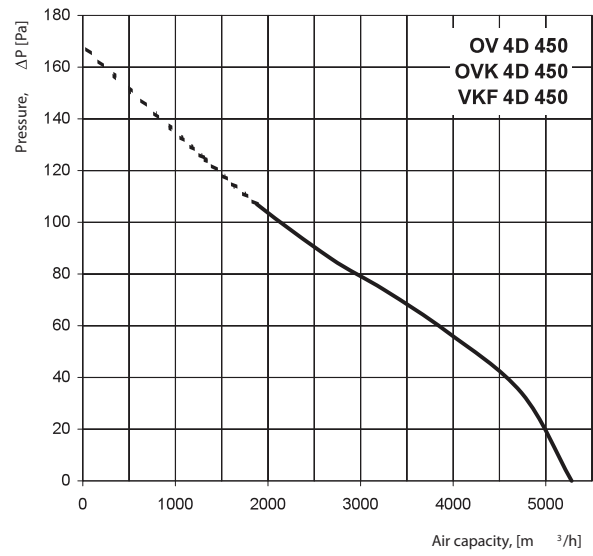

OV / OVK / VKF 4D 450

Sound-power level	Hz	Octave-frequency band [Hz]									
		Gen	63	125	250	500	1000	2000	4000	8000	
L_{WA} to environment	dB(A)	76	65	68	69	69	70	54	60	57	